


OUTPUT	POLE	SYN. SPEED	VOLT.	FREQ	INSUL.	TIME RATING	MODEL	FRAME NO.
7.5HP	4P	3600 R.P.M	230/460 V	60 Hz	F	CONT.	TEFC	
3HP	6P	1800						

- * FOR DIRECT COUPLING
- * COLOR: MUNSELL RAL 5010
- * IP55

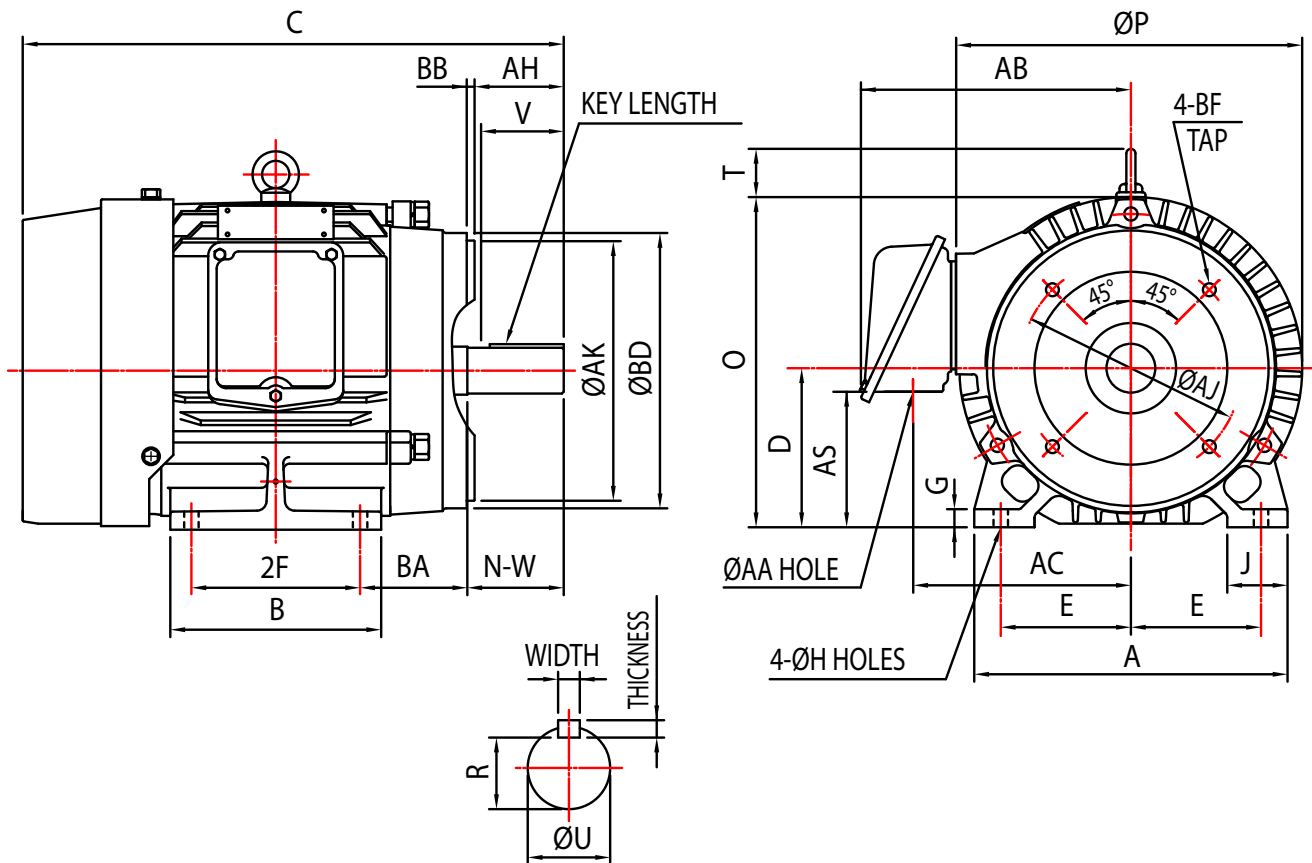

A	B	C	D	G	J	O	P	T	AJ	AK	BD	BB	BF	AH	MOUNTING			
															E	2F	H	BA
10.23	6.89	17.94	5.25	0.65	1.97	10.84	11.20	1.65	7.250	8.50	9.00	0.25	1/2 -13	3.12	4.25	5.50	0.41	3.50

CONDUIT BOX				KEY			KEYSEAT	SHAFT EXTENSION			BEARING NO.		APPR. WT. (LBS.)
AA	AB	AC	AS	WIDTH	THICKNESS	LENGTH	R	N-W	U	V	D.E	O.D.E	
NPT1"	9.29	7.2	4.4	0.312	0.312	2.375	1.201	3.38	1.375	3.30	6308zz	6208zz	180

NOTE:1.TOLERANCE OF SHAFT END DIAMETER U: +0.000inch,-0.0005inch
 2.TOLERANCE OF SHAFT CENTER HEIGHT D: +0.00inch,-0.03inch