


OUTPUT	POLE	SYN. SPEED R.P.M	VOLT.	FREQ	INSUL.	TIME RATING	MODEL	FRAME NO.
10HP	2P	3600	230/460	60	F	CONT.	TEFC	215TC
10HP	4P	1800						
5HP	6P	1200						

- \* FOR DIRECT COUPLING
- \* COLOR: MUNSELL RAL 5010
- \* IP55

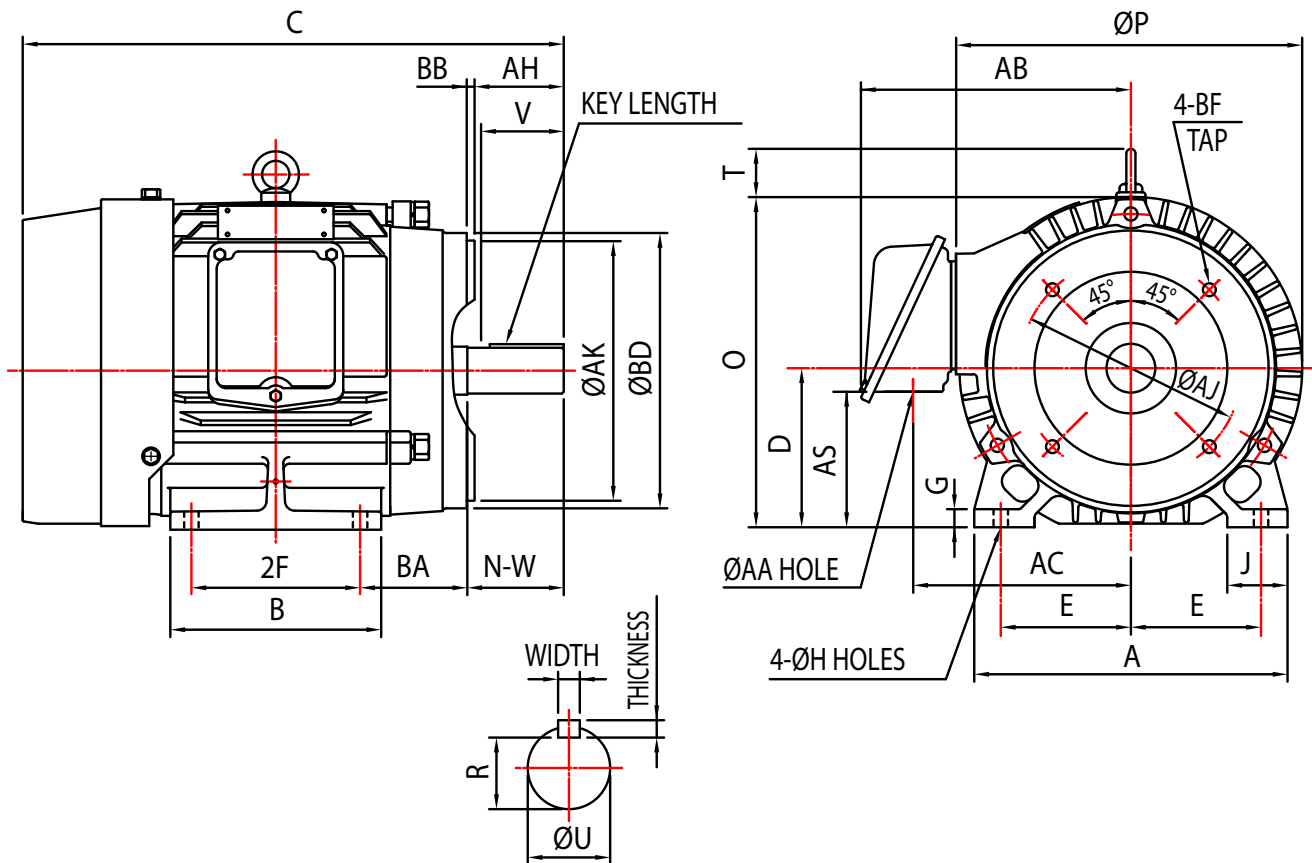

A	B	C	D	G	J	O	P	T	AJ	AK	BD	BB	BF	AH	MOUNTING			
															E	2F	H	BA
10.23	8.39	19.43	5.25	0.65	1.97	10.84	11.20	1.65	7.250	8.50	9.00	0.25	1/2 -13	3.12	4.25	7.00	0.41	3.50

CONDUIT BOX				KEY			KEYSEAT	SHAFT EXTENSION			BEARING NO.		APPR. WT. (LBS.)
AA	AB	AC	AS	WIDTH	THICKNESS	LENGTH	R	N-W	U	V	D.E	O.D.E	
NPT1"	9.29	7.2	4.4	0.312	0.312	2.375	1.201	3.38	1.375	3.30	6308zz	6208zz	192

NOTE: 1. TOLERANCE OF SHAFT END DIAMETER U: +0.000inch, -0.0005inch  
 2. TOLERANCE OF SHAFT CENTER HEIGHT D: +0.00inch, -0.03inch