


OUTPUT	POLE	SYN. SPEED	VOLT.	FREQ	TIME RATING	MODEL	FRAME NO.
10HP	6	1200	230/460	60	CONT.	TEFC	256T
20HP	4	1800					

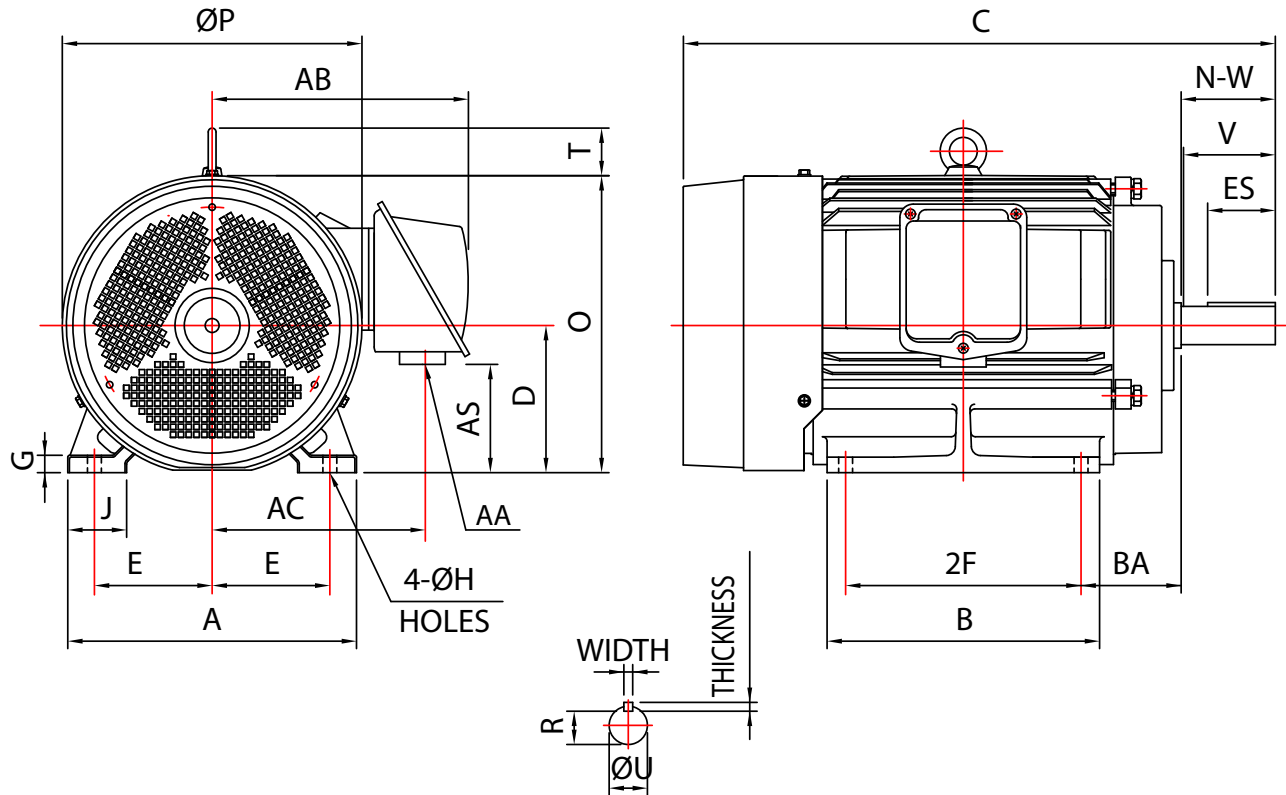

MOUNTING

E	2F	H	BA	A	B	C	D	G	J	P	AA	AB	AC
5.00	10.0	0.53	4.25	12.12	11.6	25.1	6.25	0.71	2.36	12.8	NPT1 1/4	10.8	8.82

AS	O+T	KEY		ES	KEYSEAT R	SHAFT EXTENSION			BEARING NO.		APPROX WEIGHT
		WIDTH	THICKNESS			N-W	U	V	D.E	O.D.E	
4.72	14.6	0.375	0.375	2.875	1.416	4.0	1.625	3.90	6310ZZ	6208ZZ	330 lb

- NOTE: 1. TOLERANCE OF SHAFT END DIAMETER U: +0.000,-0.001
 2. TOLERANCE OF SHAFT CENTER HEIGHT D: +0.000,-0.06
 3. DIMENSION R TOLERANCE: +0.000,-0.015
 4. DIMENSION V IS LENGTH OF STRAIGHT PART OF SHAFT.
 5. CLASS INSULATION.