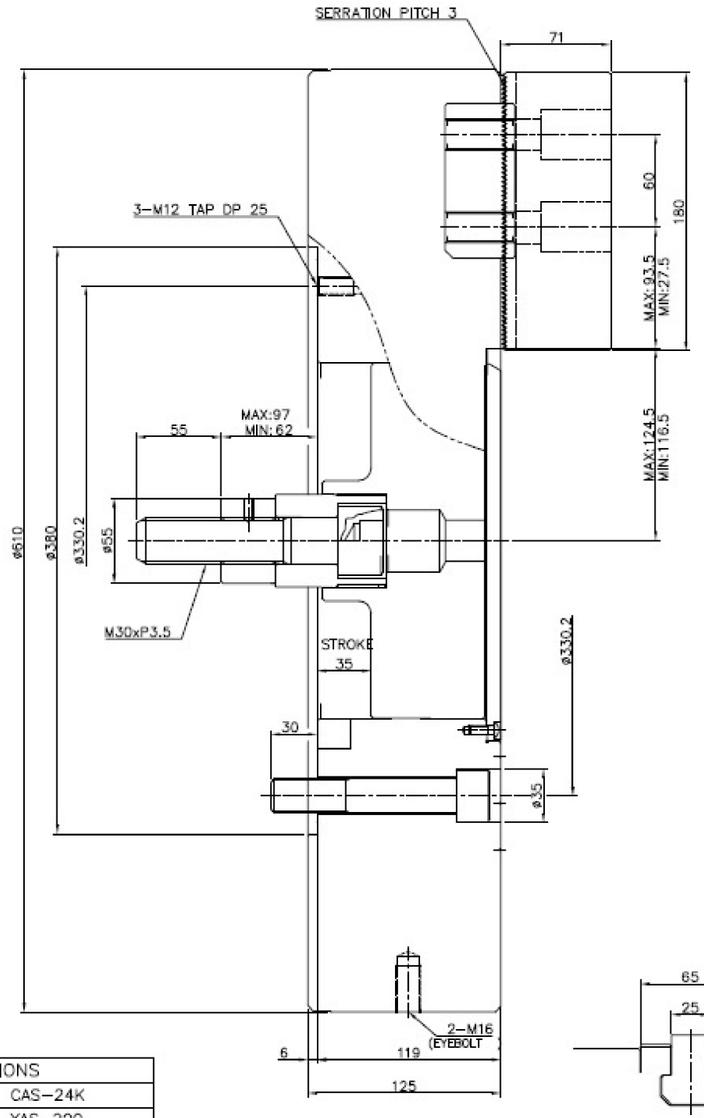



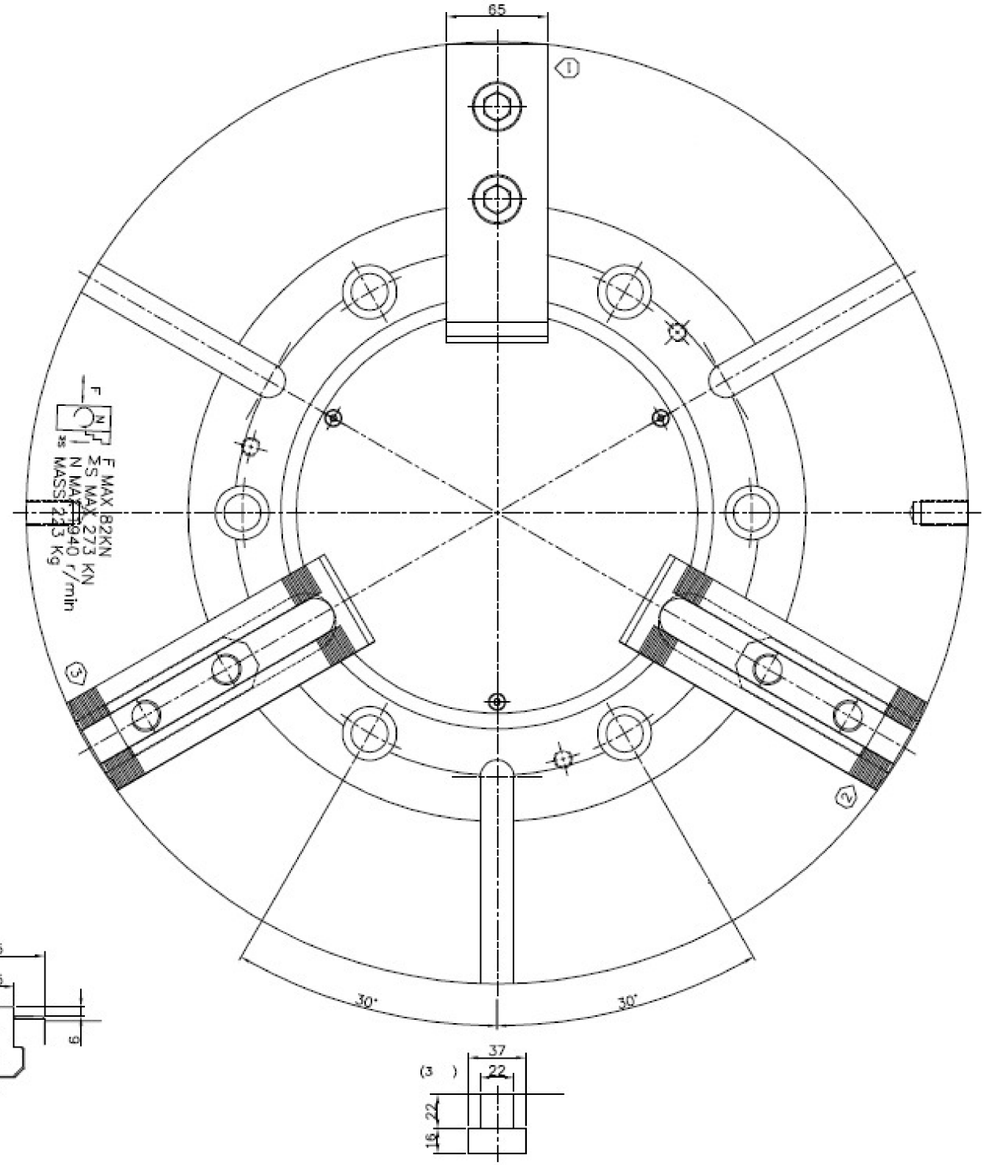

SPECIFICATIONS		
CHUCK TYPE	CAS-24K	
CYLINDER TYPE	YAS-200	
PISTON STROKE	35 mm	
JAW STROKE (DIA.)	MAX	16 mm
MAX. OPERATING PRESSURE (YAS-200)	MAX	32.6 kg/cm²
MAXIMUM DRAW BAR PULL	8362 kgf	
CLAMPING FORCE	27838 kgf	
MAX. R.P.M	1760 r.p.m	
WEIGHT	223 kg	
GD²	6.92 kg-m²	

MATERIAL: FORGED STEEL		NAME	DATE
HARDNESS:	FINISH:	DRAWN	T. THACH	09-15-2022
CONTACT INFORMATION: Toll Free 855-869-2425 Fax 508-653-5110 www.tmxtools.com 34 TALBOT ROAD NORTH BOROUGH, MA 01532 USA		ENG APPR.		
		MFG APPR.		
		Q.A. APPR.		
		SALES APPR.		
INTERPRET GEOMETRIC TOLERANCING PER: Y1999-2001			
THIRD ANGLE PROJECTION			

CONFIDENTIAL
THIS DRAWING AND THESE SPECIFICATIONS ARE THE SOLE PROPERTY OF TOOLMEX INDUSTRIAL SOLUTIONS, AND SHALL NOT BE REPRODUCED, OR COPIED IN PART OR AS A WHOLE WITHOUT THE EXPRESS WRITTEN PERMISSION OF TOOLMEX INDUSTRIAL SOLUTIONS IS PROHIBITED.

TMX™ SOLE PROPERTY OF TOOLMEX INDUSTRIAL SOLUTIONS

TITLE
CLOSED CENTER CHUCK ASS'Y

SIZE	DWG. NO.	REV
B	3-760-2400	PRE

UNITS IN MILLIMETER

DO NOT SCALE DRAWING | SHEET 1 OF 1